

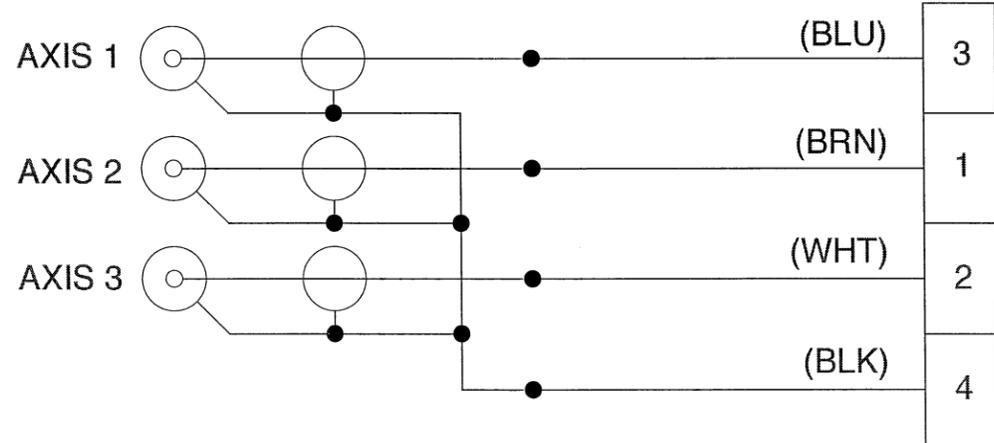


DYTRAN PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
 DYTRAN INSTRUMENTS, INC. AND ANY REPRODUCTION IN PART OR AS A
 WHOLE OR ANY OTHER DISSEMINATION OF THIS INFORMATION WITHOUT THE
 WRITTEN PERMISSION OF DYTRAN INSTRUMENTS, INC. IS PROHIBITED.

| REV | ECN | DESCRIPTION | BY/DATE | CHK | APPR |
|-----|------|-------------------|--------------|-----|------|
| A | 6777 | INITIAL RELEASE | RA, 05/18/10 | JS | DV |
| B | 7004 | UPDATED SCHEMATIC | RA, 08/18/10 | JS | DV |

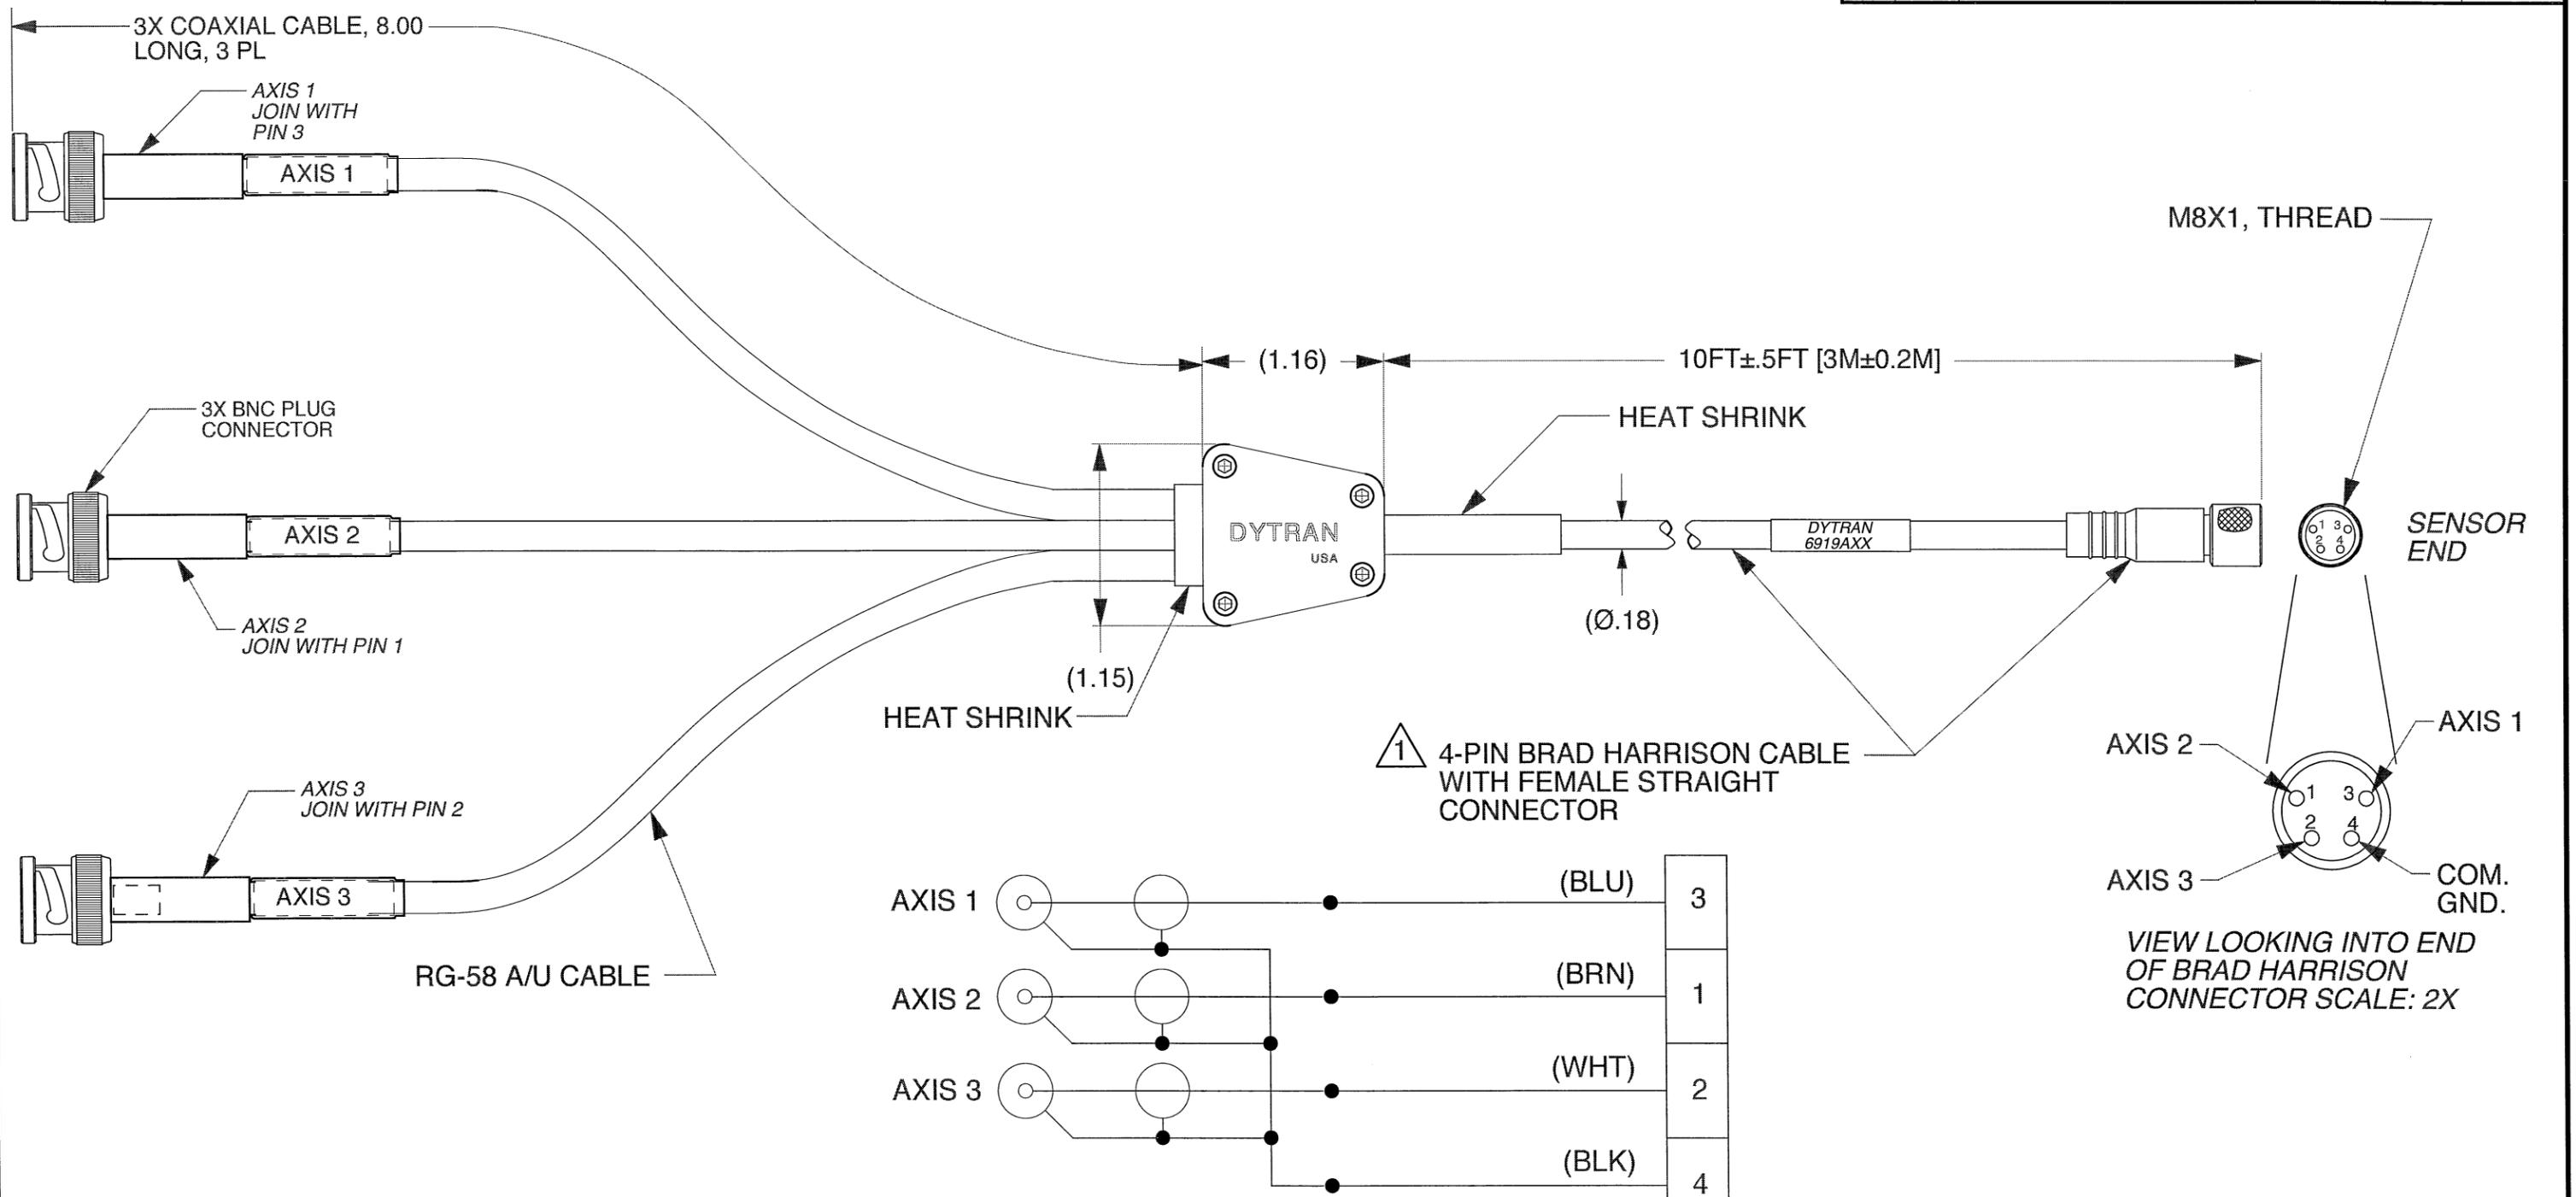

SCHEMATIC DIAGRAM

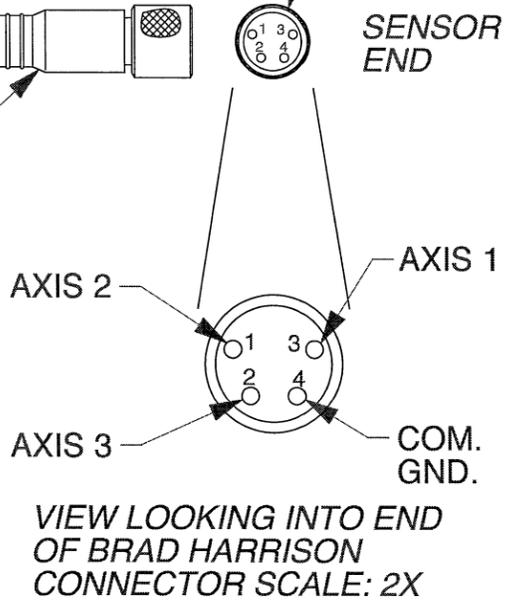

2. OPERATING TEMP: -40°F TO 167°F (-40° TO 75°C)
 1 MATING CONNECTOR: BRAD HARRISON 4R4P06A27C300

EXCEPT AS OTHERWISE NOTED
 ALL DIMENSIONS IN INCHES
 TOLERANCE: .xxx = ± .005 .xx = ± .01
 SURFACE FINISH 63
 EXCEPT AS NOTED
 BREAK EDGES TO DEBURR .003
 RADIUS OR CHAMFER
 THESE DIAS TO T.I.R.
 FILLETS - MAX RAD.

DYTRAN INSTRUMENTS, INC. CHATSWORTH, CA.
MASTER ONLY IF IN RED

| | | | | | |
|--|---------------|-----------------|-------------------|--|-------|
| SCALE 1X | DESIGN NC | DATE - | | | |
| DRAWN RA | DATE 05/18/10 | PART NO. - | | | |
| CHECKED JS | DATE 05/24/10 | MAT'L | | | REV B |
| APPROVED DV | DATE 05/24/10 | NEXT ASSEMBLY - | USED ON 6919AXX | | |
| TITLE | | | DWG NO. 127-6919A | | |
| OUTLINE/INSTALLATION DRAWING, 4-PIN TO THREE BNC PLUGS | | | SHEET 1 OF 1 | | |