


PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED

REVISIONS

REV	ECN	DESCRIPTION	BY/DATE	CHK	APPR
B	8335	REVISED TO REFLECT ACTUAL VIEW OF CONNECTOR	JS 02/19/12	RA	DV
C	10364	NOTE 2 WAS: 200 °C	JS 09/11/13	RA	DV

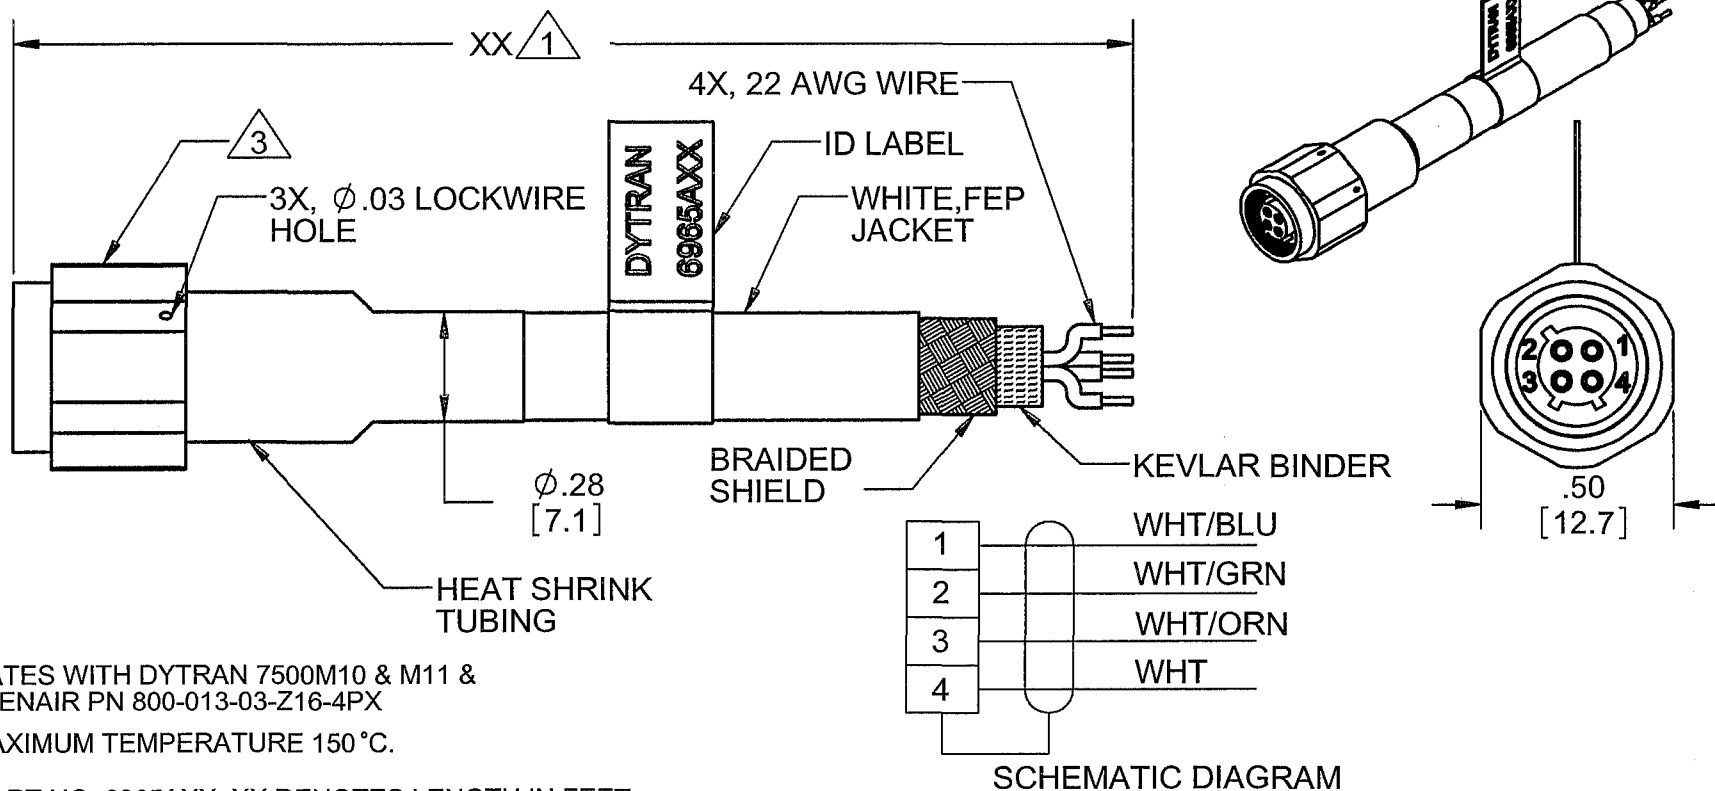

3 MATES WITH DYTRAN 7500M10 & M11 & GLENAIR PN 800-013-03-Z16-4PX

2. MAXIMUM TEMPERATURE 150 °C.

1 PART NO. 6965AXX, XX DENOTES LENGTH IN FEET.

NOTES: UNLESS OTHERWISE SPECIFIED

USED ON	NEXT ASSY
APPLICATION	
THIRD ANGLE PROJECTION USA	

UNLESS OTHERWISE SPECIFIED:
INTERPRET DIM & TOL PER
ASME Y14.5M - 1994.
REMOVE BURRS.
COUNTERSINK INTERNAL THDS
90° TO MAJOR DIA.
CHAM EXT THDS 45° TO MINOR DIA.
THD LENGTHS AND DEPTHS ARE FOR
MIN FULL THDS.
THDS PER MIL-S-7742.
DIMENSIONS APPLY AFTER FINISHING.

ALL MACHINED SURFACES.
TOTAL RUNOUT WITHIN .005.
BREAK SHARP EDGES .005 TO .010.
MACHINED FILLET RADII .005 TO .015.
WELDING SYMBOLS PER AWS A2.4.
ABBREVIATIONS PER MIL-STD-12

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES.
DIMENSIONS IN BRACKETS []
ARE IN MILLIMETERS
TOLERANCES ARE:
INCHES METRIC ANGLES
.XX ± .03 .X ± 0.8 ± 1°
.XXX ± .010 .XX ± 0.25

MATERIAL
FINISH
DO NOT SCALE DRAWING

CONTRACT NO.



TITLE:

**OUTLINE/INSTALLATION
DRAWING, 6965A**

APPROVALS	DATE
ORIG JS	06/15/11
CHK DV	08/22/11
APP ANS	08/23/11
APP <i>DV</i>	9/23/13

SIZE	CAGE CODE	DWG. NO.	REV
A	2W033	127-6965A	C
SCALE: NONE	SOLIDWORKS	SHEET 1 OF 1	