
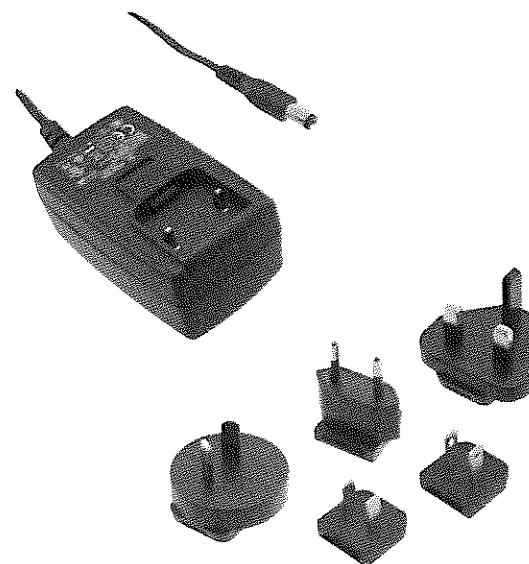


PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYTRAN INSTRUMENTS INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYTRAN INSTRUMENTS INC. IS PROHIBITED

REVISIONS

REV	ECN	DESCRIPTION	BY/DATE	CHK	APPR
A	14520	INITIAL RELEASE: NOTE 5: ADDED: TEMPERATURE IN FAHRENHEIT	AM 09/25/18	KG	W

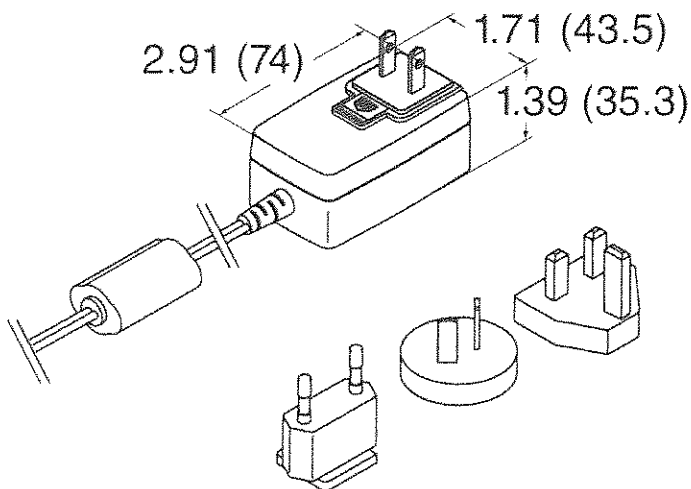

6. CORD LENGTH: 60.2" (1.53m)
5. OPERATING TEMPERATURE: 0°C (+32°F) to 40°C (+104°F).
4. NO LOAD POWER CONSUMPTION: 300mW MAX.
3. CURRENT OUTPUT: 2A MAX.
2. OUTPUT VOLTAGE: 20 VDC
1. INPUT VOLTAGE: 90-264 VAC

UNLESS OTHERWISE SPECIFIED: INTERPRET DIM & TOL PER ASME Y14.5M - 1994. REMOVE BURRS. COUNTERSINK INTERNAL THDS 90° TO MAJOR DIA. CHAM EXT THDS 45° TO MINOR DIA. THD LENGTHS AND DEPTHS ARE FOR MIN FULL THDS. THDS PER MIL-S-7742. DIMENSIONS APPLY AFTER FINISHING.	
USED ON	NEXT ASSY
APPLICATION	
THIRD ANGLE PROJECTION USA	
	
ALL MACHINED SURFACES. TOTAL RUNOUT WITHIN .005. BREAK SHARP EDGES .005 TO .010. MACHINED FILLET RADII .005 TO .015. WELDING SYMBOLS PER AWS A2.4. ABBREVIATIONS PER MIL-STD-12.	

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS TOLERANCES ARE:		
INCHES	METRIC	ANGLES
.XX ± .03	.X ± 0.8	± 1°
.XXX ± .010	.XX ± 0.25	
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

CONTRACT NO.

APPROVALS		DATE
ORIG	LN	01/24/17
CHK	KG	10/4/18
APP	W	10/1/18
APP		



MASTER
ONLY IF IN RED
Chatsworth, CA

TITLE: **OUTLINE/INSTALLATION DWG,
POWER SUPPLY, AC/DC ADAPTER,
20VDC, 40W, MODEL 69004**

SIZE A	CAGE CODE 2W033	DWG. NO. 127-69004	REV A
SCALE: NONE		SOLIDWORKS	SHEET 1 OF 1