


Terms and Conditions of Use

This drawing, including all information depicted herein (collectively, “Drawing”), is FUTEK’s property and protected under applicable law, including copyright. FUTEK reserves all rights. The Drawing is provided solely for your information and exclusive use. **Except as expressly approved by FUTEK in writing, you may not reproduce or share this Drawing**, in whole or part, with any other firm or individual, or attempt to reverse engineer the Drawing or data contained therein. Any reproduction of this Drawing in whole or part must include this legend.


By accessing the Drawing, you agree that you have read, understand, and agree to abide by the stated Terms and Conditions of Use.

© 2023 FUTEK Advanced Sensor Technology, Inc.

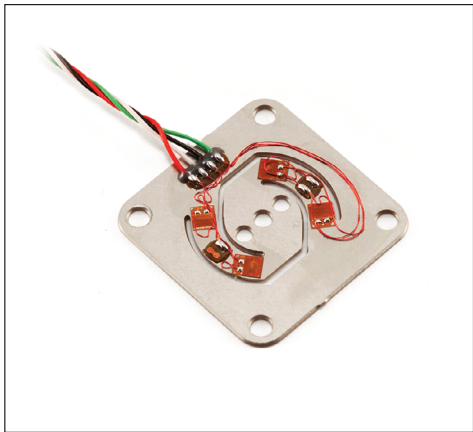


FEATURES

- Designed for OEM and high quantity Applications
- Slim, low profile design
- Materials testing and applied force validation

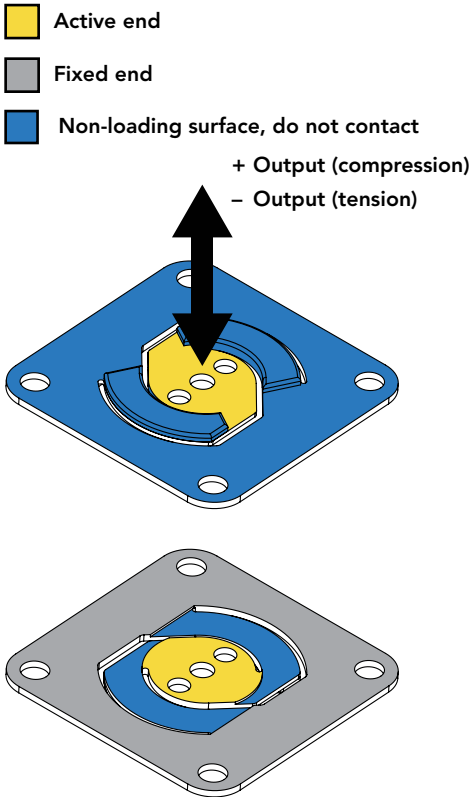


SPECIFICATIONS	
PERFORMANCE	
Capacity	1 lb
Nonlinearity	±0.25% of RO
Hysteresis	±0.25% of RO
Nonrepeatability	±0.1% of RO
ELECTRICAL	
Rated Output (RO)	1.5 mV/V nom
Excitation (VDC or VAC)	10 max
Bridge Resistance	350 Ohm nom
Insulation Resistance	≥500 MOhm @ 50 VDC
Connection	#29 AWG, 4 conductor, Teflon wire 6 in [152 mm] long
Wiring Code	WC1
MECHANICAL	
Weight	0.1 oz [2.8 g]
Safe Overload	150% of RO
Deflection	0.004 in [0.10 mm] nom
Material	300 series stainless-steel
IP Rating	IP00
TEMPERATURE	
Operating Temperature	-60 to 200°F [-51 to 93°C]
Compensated Temperature	60 to 160°F [15 to 72°C]
Temperature Shift Zero	±0.02% of RO/°F [0.036% of RO/°C]
Temperature Shift Span	±0.02% of Load/°F [0.036% of Load/°C]
CALIBRATION	
Calibration Test Excitation	5 VDC
Calibration (standard)	5-pt compression
Calibration (available)	Tension and compression
Shunt Calibration Value	60.4 kOhm

DIMENSIONS inches [mm]

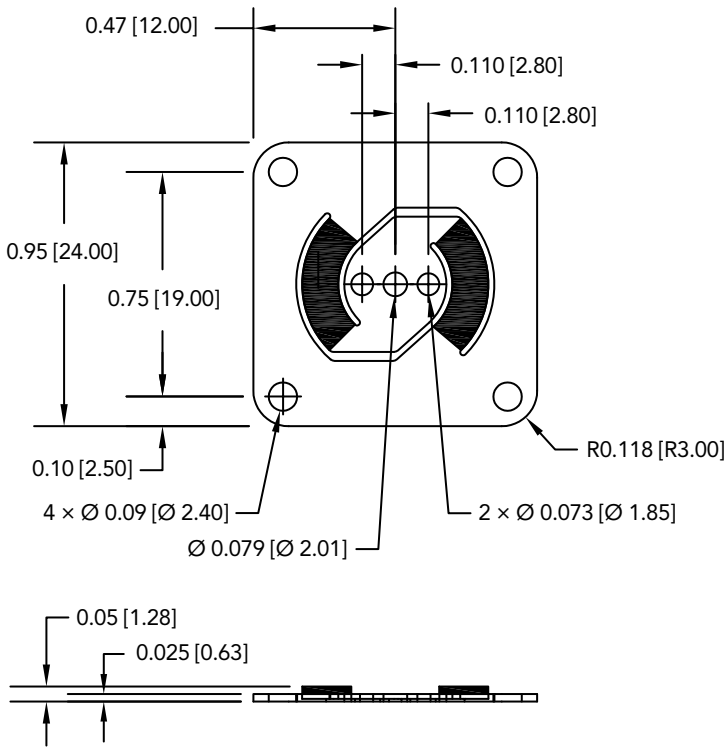


WIRING CODE (WC1)

RED	+ EXCITATION
BLACK	- EXCITATION
GREEN	+ SIGNAL
WHITE	- SIGNAL

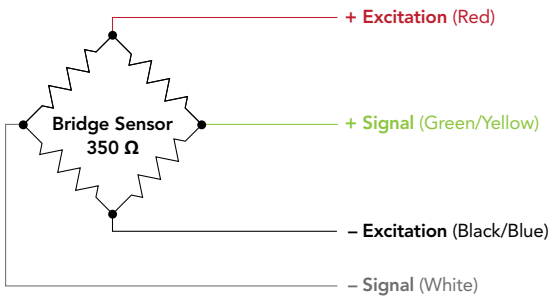

MOUNTING GUIDE inches [mm]

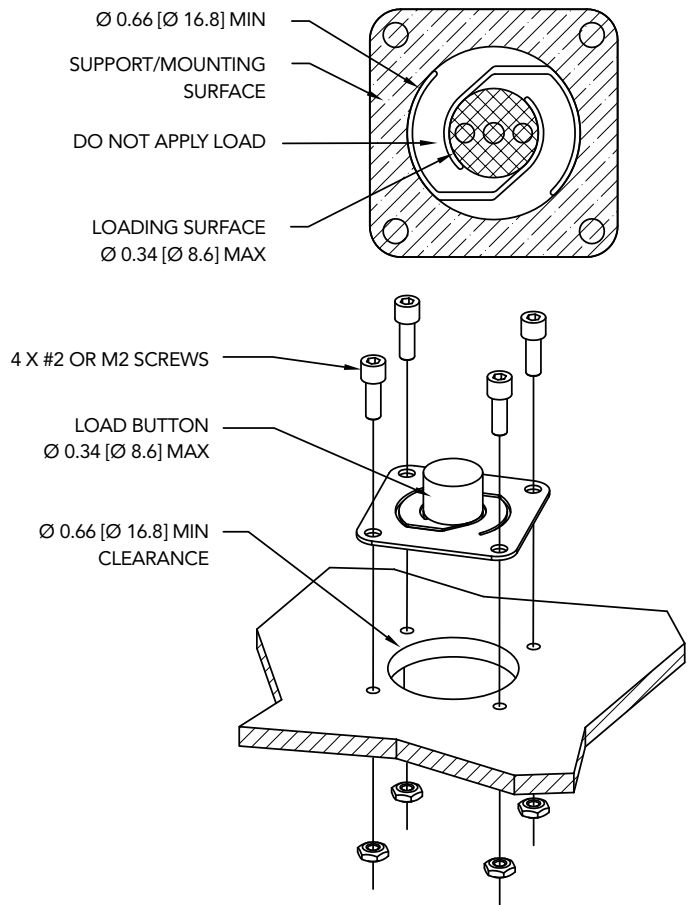

Drawing Number: FI1117-E

FUTEK reserves the right to modify its design and specifications without notice.
Please visit www.futek.com/salesterms for complete terms and conditions.

10 Thomas, Irvine, CA 92618 USA

Tel: (949) 465-0900

Fax: (949) 465-0905

www.futek.com

